



LG VX4400 Removing the Back Cover

This guide will show you how to remove the back cover of the LG VX4400.

Written By: Nico Chiarito






TOOLS:


- [iFixit Opening Tools](#) (1)
 - [Spudger](#) (1)
 - [T6 Torx Screwdriver](#) (1)
-

Step 1 — Battery

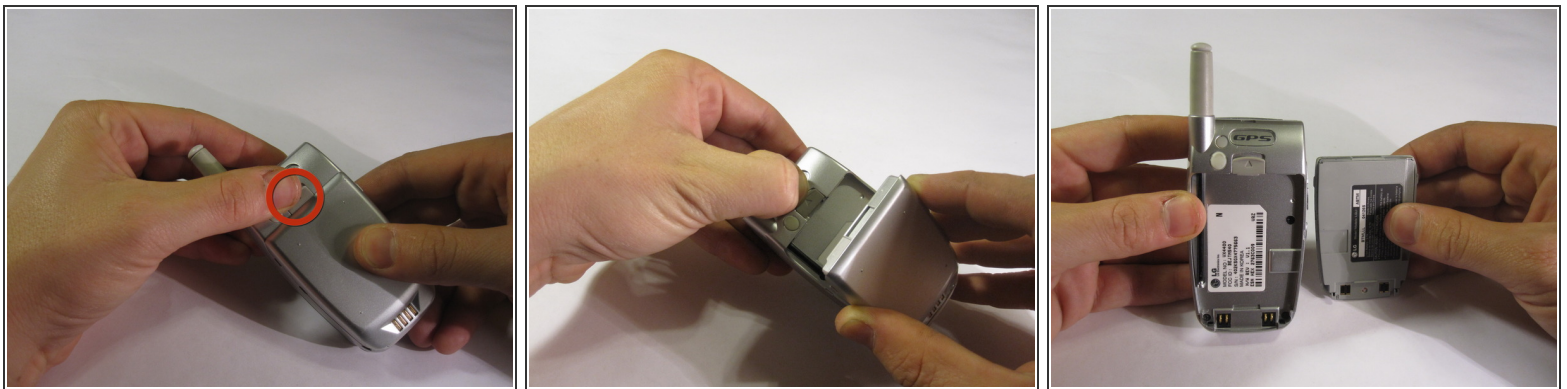

- While sliding the latch above the battery upwards, grasp top of battery and pull away from phone. Set battery aside.

Step 2 — Antenna

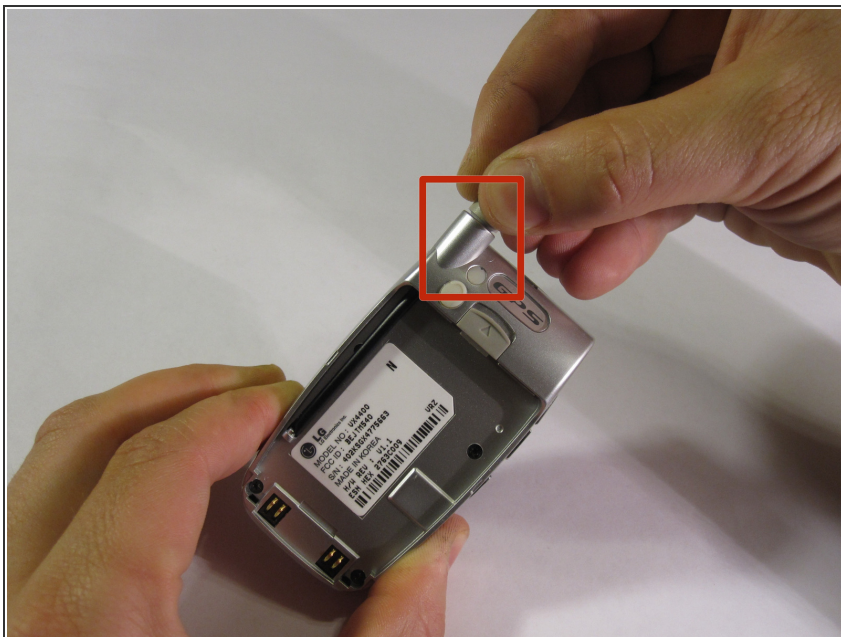


- Unscrew the antenna by grasping the base and twisting counterclockwise.
- ⚠ The antenna may separate from a black sleeve during removal. You may need to use tweezers to remove the sleeve. Remove both the antenna and the sleeve and set aside.

Step 3 — Back Cover




- The phone may have a rubber insert in the bottom of the phone (see picture). If this rubber insert exists, remove it from the bottom of phone and set aside.

Step 4

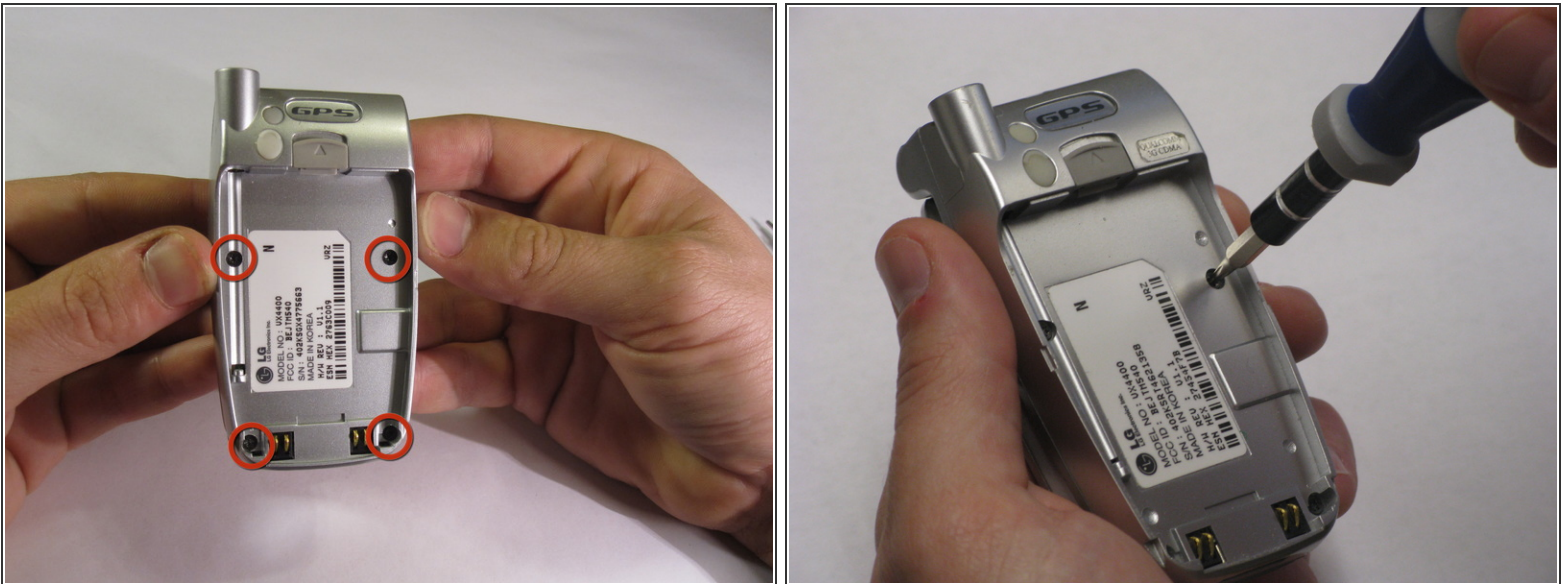


- Using a Torx screwdriver with a T6-sized bit, unscrew the four screws on the back of the phone.
- ⓘ The bit size is engraved on the base of the bit head.

Step 5

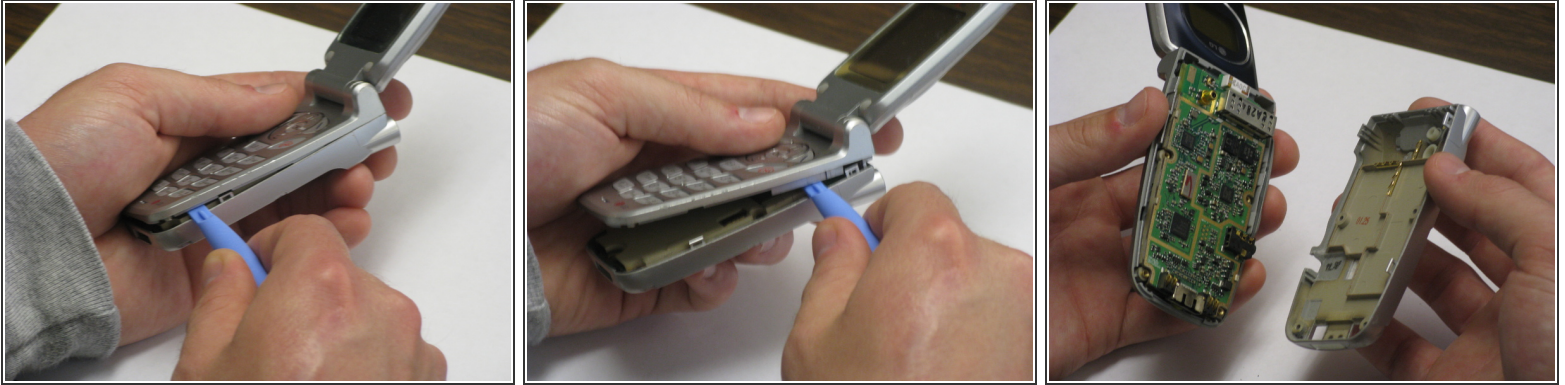

- With the phone flipped open, wedge the back cover from the faceplate by running the tip of the plastic opening tool around the seam on the back of the phone.
 - Gently pull the two pieces apart to separate.
- ⚠ Apply enough force to separate the pieces without cracking the back cover.

Step 6

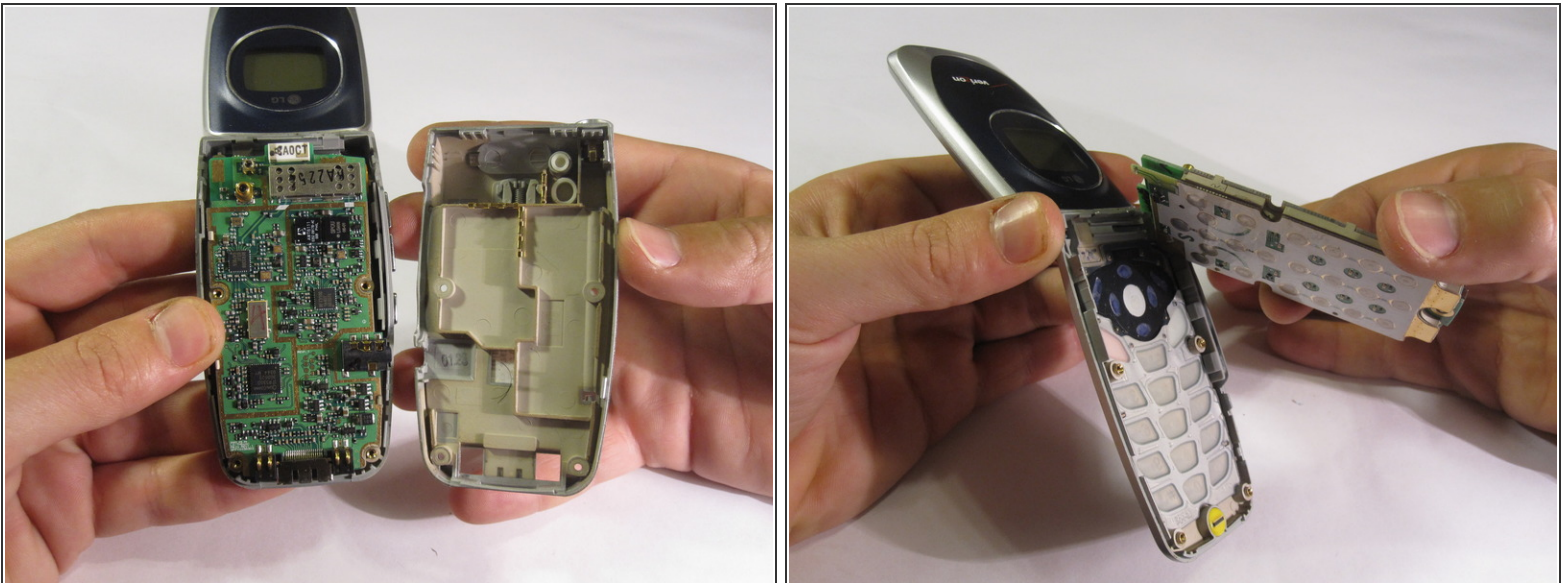

- Lift the computer chip to gain access to the keypad and side buttons beneath.
- ⚠ CAUTION: The computer chip is attached with a thin ribbon wire at upper right corner of case. DO NOT BREAK THE RIBBON WIRE.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-24 08:43:51 AM.